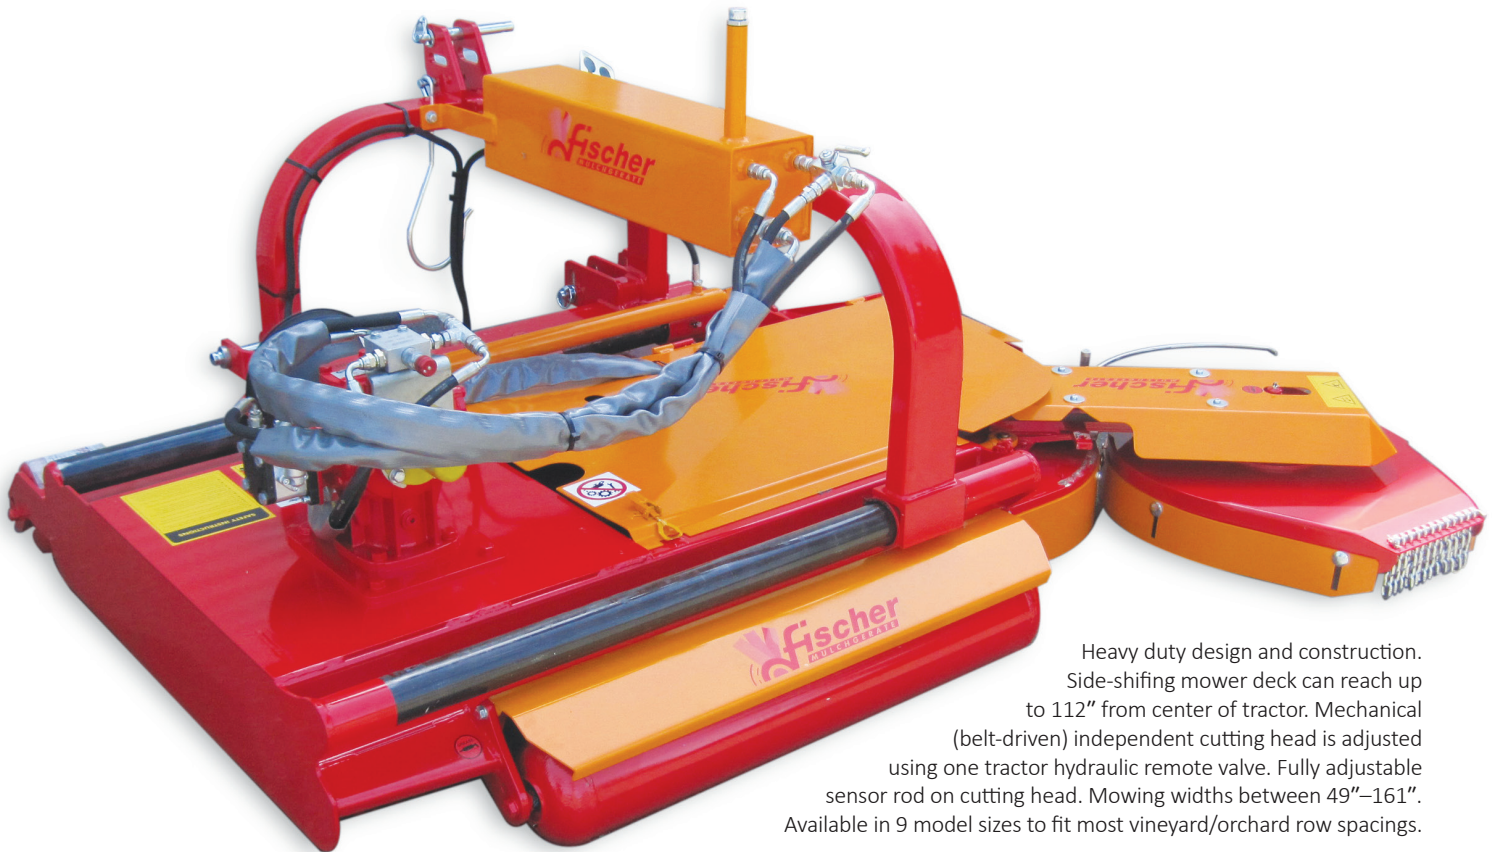


SL Deck Mower

Unique orchard/vineyard deck mower with single side in-row cutting head (belt-driven) & off-set mowing frame. Low & compact design reaches under tree canopies & vineyard trellis systems.

Fully adjustable precision sensor rod controls in-row mowing head to effectively & safely mow around base of trees/vines.



Heavy duty design and construction. Side-shifting mower deck can reach up to 112" from center of tractor. Mechanical (belt-driven) independent cutting head is adjusted using one tractor hydraulic remote valve. Fully adjustable sensor rod on cutting head. Mowing widths between 49"-161". Available in 9 model sizes to fit most vineyard/orchard row spacings.

Standard Equipment








- | Cat. 1 & 2 three-point hitch
- | 540 rpm PTO gearbox
- | 24" in-row cutting head
- | Easy adjustable sensor rod
- | Hydraulic PTO pump and oil tank for sensor rod actuation

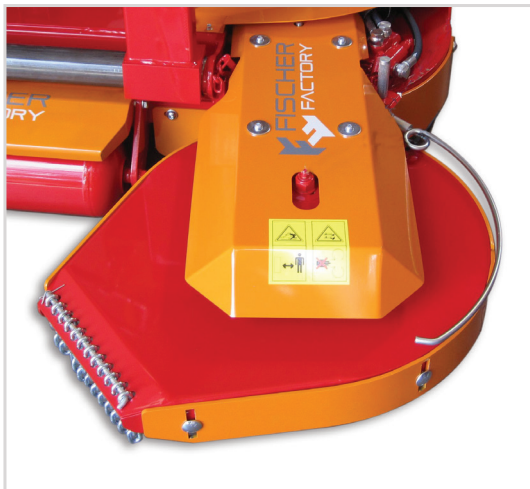
- | Flow control on all hydraulic components
- | Adjustable metal wheels/roller for cutting height adjustment
- | Cat. 5 heavy duty driveline with slip-clutch protection

Optional Equipment

- | 32" In-row cutting head
- | Pnuematic front/rear wheels

SL DECK MOWER + IN-ROW CUTTING HEAD

MODEL									
	DECK BLADES	FIXED BLADES	SWING BLADES	WEIGHT	TRACTOR SIZE	A (INC)	B (INC)	C (INC)	OFFSET DIMS
SL2-125-170	2	2	2	858	40-80 Hp	49"	67"	49"	$\frac{25"}{0"} \quad \frac{25"}{49"}$
SL2-140-190	2	2	2	924	40-80 Hp	55"	75"	51"	$\frac{28"}{0"} \quad \frac{28"}{55"}$
SL2-160-210	2	2	2	990	40-80 Hp	63"	83"	53"	$\frac{31"}{0"} \quad \frac{31"}{63"}$
SL3-180-230	3	3	2	1,078	50-80 Hp	71"	91"	49"	$\frac{33"}{0"} \quad \frac{37"}{71"}$
SL3-200-250	3	3	2	1,144	50-80 Hp	79"	98"	51"	$\frac{33"}{0"} \quad \frac{45"}{79"}$
SL3-230-280	3	3	2	1,210	60-90 Hp	91"	110"	53"	$\frac{37"}{0"} \quad \frac{53"}{91"}$
SL4-270-320	4	4	2	1,320	60-90 Hp	106"	126"	51"	$\frac{53"}{18"} \quad \frac{53"}{88"}$
SL4-310-360	4	4	2	1,452	70-100 Hp	122"	142"	53"	$\frac{61"}{25"} \quad \frac{61"}{97"}$
SL4-360-410	4	4	2	1,650	70-100 Hp	142"	161"	61"	$\frac{66"}{30"} \quad \frac{79"}{112"}$



Hydraulic Sensor Rod Head (Available in 24" and 32" sizes)



Spring Actuated Cutting Head with Protective Rubber Ring (Available in only 24" head size)