


Flail Mower/Shredder—Series T3L

Unique flail mower/shredder with an in-the-row hydraulic cutting head. Standard hydraulic off-set using tractor remove valve to reach under vines/trees. Single 26" in-row cutting heads can oscillate vertically to follow all types of terrain. Head can also be

independently angled to +/-15 degrees to work on slopes and slight terrace situations. Spring actuated cutting head gently rolls around vines and tree trunks. Rubber bumper ring on cutting heads protects vine/trees from damage.

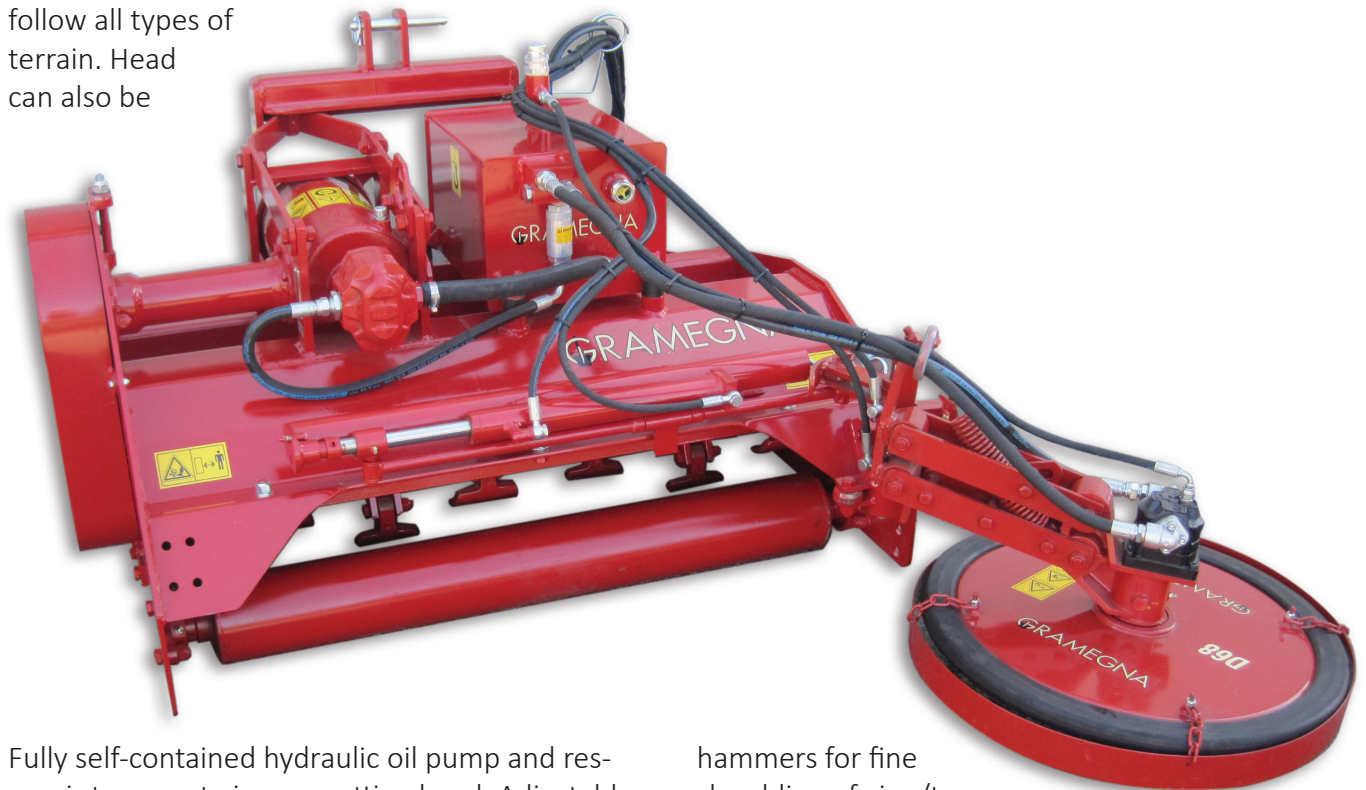

Fully self-contained hydraulic oil pump and reservoir to operate in-row cutting head. Adjustable rear roller to control cutting height. Available in 4 model sizes to fit a wide range of vineyard/orchard row configurations. Equipped with standard flail






hammers for fine shredding of vine/tree clippings. Optional Y knives are available. Heavy duty construction and frame for many years of reliable service.

Standard Equipment


- | Cat. I/II three-point hitch
- | 540 rpm PTO gearbox
- | Single spring-actuated D. 26" in-row hydraulic cutting head
- | Adjustable angle tilting cutting head
- | Hydraulic off-set frame
- | Self-contained hydraulic system
- | Equipped with flail hammers
- | Heavy duty design and construction
- | Cat. 6 driveline with slip-clutch protection included

GRAMEGNA

FLAIL MOWER/SHREDDER—SERIES T3L

	 Lbs				
MODEL	WEIGHT	MIN/ MAX WIDTH	TRACTOR SIZE	NR FLAILS	ROW SPACING
T3L-125	1,150	54–74"	45–95 Hp	14	6–7'
T3L-145	1,229	61–82"	45–95 Hp	18	7–8'
T3L-165	1,300	67–88"	55–95 Hp	18	8'+
T3L-180	1,370	76–100"	55–95 Hp	22	9'+

IMPLEMENT FEATURES

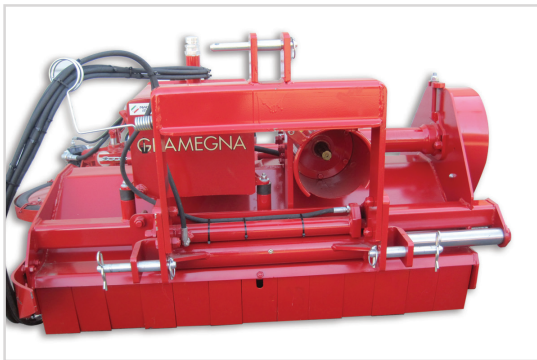

Hydraulic off-set of mower on 3-point frame to reach under vines and trees



Cutting head can freely oscillate vertically to follow soil contour and terrain



Cutting head can be hydraulically angled using tractor's remote valve to work on slopes and slight terraces